

Mechanical specifications

Length	1205 mm	47.44 in
Width	386 mm	15.2 in
Depth	335 mm	13.19 in
4) Weight	9.07 kg	20 lbs

Wind Area

Front	0.465 m ²	5.01 ft ²
Side	0.404 m ²	4.35 ft ²

Rated Wind Velocity (Safety factor 2.0)

>351 km/hr >218 mph

Wind load @ 100 mph (161 km/hr)

Front	665 N	149.5 lbs
Side	577 N	129.6 lbs

Antenna consisting of aluminum alloy with brass feedlines covered by a UV safe fiberglass radome.

Mounting & Downtilting:

Mounting brackets attach to a pipe diameter of Ø50-102 mm (2.0-4.0 in).

Mounting bracket kit #21699999

Downtilt bracket kit #21699999

The downtilt bracket kit includes the mounting bracket kit.

Electrical specifications

Frequency Range	806-960 MHz
Impedance	50Ω
3) Connector	NE, E-DIN
1) VSWR	≤1.4:1
Polarization	Vertical
1) Gain	13 dBd
2) Power Rating	500 W
1) Half Power Angle	
H-Plane	63°
E-Plane	15°
1) Electrical Downtilt	5°
1) Null Fill	10%
Lightning Protection	Direct Ground

¹⁾ Typical Values

²⁾ Power Rating limited by connector only.

³⁾ NE indicates an elongated N Connector.

E-DIN indicates an elongated DIN Connector.


⁴⁾ The antenna weight listed above does not include the bracket weight.

Improvements to mechanical and/or electrical performance of the antenna may be made without notice.


LPA-80063/4CF ___ 5°

When ordering, replace "___" with connector type.

Radiation-pattern¹⁾

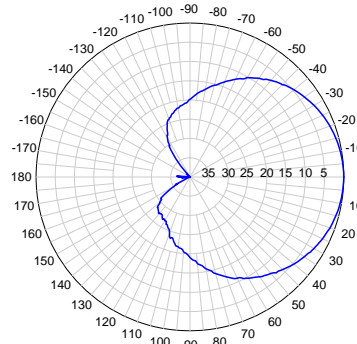

Horizontal



Vertical


Featuring upper side lobe suppression.

Radiation patterns for all antennas are measured with the antenna mounted on a fiberglass pole.

Mounting on a metal pole will typically improve the Front-to-Back Ratio.

CF Denotes a Center-Fed Connector.

806-960 MHz

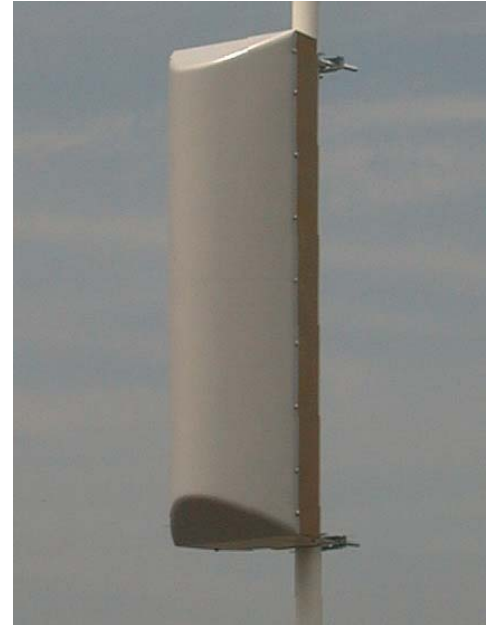

Amphenol Antel's Exclusive 3T (True Transmission Line Technology) Antenna Design:

- True log-periodic design allows for superior front-to-side characteristics to minimize sector overlap.
- Unique feedline design eliminates the need for conventional solder joints in the signal path.
- A non-collinear system with access to every radiating element for broad bandwidth and superior performance.
- Air as insulation for virtually no internal signal loss.

Every Amphenol Antel antenna is under a five-year limited warranty for repair or replacement.

Antenna available with center-fed connector only.

